

DATA SHEET

FortiGate® 1000D Series

FG-1000D

Next Generation Firewall Segmentation Secure Web Gateway IPS Mobile Security



The FortiGate 1000D series delivers high performance next generation firewall (NGFW) capabilities for large enterprises and service providers. With multiple high-speed interfaces, high-port density, and high-throughput, ideal deployments are at the enterprise edge, hybrid data center core, and across internal segments. Leverage industry-leading IPS, SSL inspection, and advanced threat protection to optimize your network's performance. Fortinet's Security-Driven Networking approach provides tight integration of the network to the new generation of security.

Security

- Identifies thousands of applications inside network traffic for deep inspection and granular policy enforcement
- Protects against malware, exploits, and malicious websites in both encrypted and non-encrypted traffic
- Prevent and detect against known and unknown attacks using continuous threat intelligence from Al-powered FortiGuard Labs security services

Performance

- Delivers industry's best threat protection performance and ultra-low latency using purpose-built security processor (SPU) technology
- Provides industry-leading performance and protection for SSL encrypted traffic

Certification

- Independently tested and validated for best-in-class security effectiveness and performance
- Received unparalleled third-party certifications from NSS Labs

Networking

- Delivers advanced networking capabilities that seamlessly integrate with advanced layer 7 security and virtual domains (VDOMs) to offer extensive deployment flexibility, multi-tenancy and effective utilization of resources
- Delivers high-density, flexible combination of various high-speed interfaces to enable best TCO for customers for data center and WAN deployments

Management

- Includes a management console that is effective, simple to use, and provides comprehensive network automation and visibility
- Provides Zero Touch Integration with Fortinet's Security Fabric's Single Pane of Glass Management
- Predefined compliance checklist analyzes the deployment and highlights best practices to improve overall security posture

Security Fabric

 Enables Fortinet and Fabric-ready partners' products to provide broader visibility, integrated end-to-end detection, threat intelligence sharing, and automated remediation

Firewall	IPS	NGFW	Threat Protection	Interfaces
52 Gbps	6 Gbps	5 Gbps	4 Gbps	Multiple GE RJ45, GE SFP and 10 GE SFP+ slots



DEPLOYMENT



Next Generation Firewall (NGFW)

- Reduce the complexity and maximize your ROI by integrating threat protection security capabilities into a single high-performance network security appliance, powered by Fortinet's Security Processing Unit (SPU)
- Full visibility into users, devices, applications across the entire attack surface and consistent security policy enforcement irrespective of asset location
- Protect against network exploitable vulnerabilities with Industry-validated IPS security effectiveness, low latency and optimized network performance
- Automatically block threats on decrypted traffic using the Industry's highest SSL inspection performance, including the latest TLS 1.3 standard with mandated ciphers
- Proactively block newly discovered sophisticated attacks in real-time with Al-powered FortiGuard Labs and advanced threat protection services included in the Fortinet Security Fabric



Segmentation

- Segmentation that adapts to any network topology, delivering end-to-end security from the branch level to data centers and extending to multiple clouds
- Reduce security risks by improving network visibility from the components of the Fortinet Security Fabric, which adapt access permissions to current levels of trust and enforce access control effectively and efficiently
- Delivers defense in depth security powered by highperformance L7 inspection and remediation by Fortinet's SPU, while delivering third party validated TCO of per protected Mbps
- Protects critical business applications and helps implement any compliance requirements without network redesigns



Secure Web Gateway (SWG)

- Secure web access from both internal and external risks, even for encrypted traffic at high performance
- Enhanced user experience with dynamic web and video caching
- Block and control web access based on user or user groups across URL's and domains
- Prevent data loss and discover user activity to known and unknown cloud applications
- Block DNS requests against malicious domains
- Multi-layered advanced protection against zero-day malware threats delivered over the web




IPS

- Purpose-built security processors delivering industry validated IPS performance with high throughput and low latency
- Deploy virtual patches at the network level to protect against network exploitable vulnerabilities and optimize network protection time
- Deep packet inspection at wire speeds offers unparalleled threat visibility into network traffic including traffic encrypted with the latest TLS 1.3
- Proactively block newly discovered sophisticated attacks in real-time with advanced threat protection provided by the intelligence services of the Fortinet Security Fabric



Mobile Security for 4G, 5G, and IOT

- SPU accelerated, high performance CGNAT and IPv6 migration option including: NAT44, NAT444, NAT64/DNS64, NAT46 for 4G Gi/sGi and 5G N6 connectivity and security
- RAN Access Security with highly scalable and best performing IPsec aggregation and control security gateway (SecGW)
- User plane security enabled by full Threat Protection and visibility into GTP-U inspection
- 4G and 5G security for user and data plane traffic including SCTP, GTP-U and SIP that provides protection against attacks
- High-speed interfaces to enable deployment flexibility




Data Center Deployment (NGFW, IPS, and Intent-based Segmentation)



HARDWARE

FortiGate 1000D

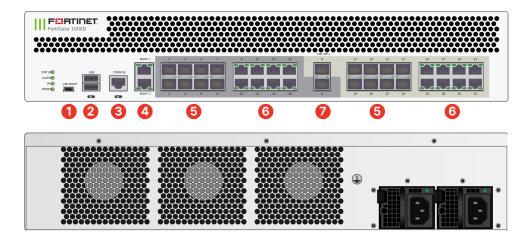

Interfaces

- 1. USB Management Port
- 2. USB Ports
- 3. Console Port
- 4. 2x GE RJ45 Management Ports
- 5. 16x GE SFP Slots
- 6. 16x GE RJ45 Ports
- 7. 2x 10 GE SFP+ Slots


Hardware Features






NP Direct

By removing the Internal Switch Fabric, the NP Direct architecture provides direct access to the SPU-NP for the lowest latency forwarding. NGFW deployments require some attention to network design to ensure optimal use of this technology.





- Other security technologies cannot protect against today's wide range of content- and connectionbased threats because they rely on general-purpose CPUs, causing a dangerous performance gap
- SPU processors provide the performance needed to block emerging threats, meet rigorous third-party certifications, and ensure that your network security solution does not become a network bottleneck

Network Processor

Fortinet's new, breakthrough SPU NP6 network processor works inline with FortiOS functions delivering:

- Superior firewall performance for IPv4/IPv6, SCTP and multicast traffic with ultra-low latency
- VPN, CAPWAP and IP tunnel acceleration
- Anomaly-based intrusion prevention, checksum offload, and packet defragmentation
- Traffic shaping and priority queuing

Content Processor

Fortinet's ninth generation custom SPU CP9 content processor works outside of the direct flow of traffic and accelerates the inspection.

High-Speed Connectivity

High-speed connectivity is essential for network security segmentation. The FortiGate 1000D provides 10 GE slots that simplify network designs without relying on additional devices to bridge desired connectivity.



FORTINET SECURITY FABRIC

Security Fabric

The industry's highest-performing cybersecurity platform, powered by FortiOS, with a rich ecosystem designed to span the extended digital attack surface, delivering fully automated, self-healing network security.

- Broad: Coordinated detection and enforcement across the entire digital attack surface and lifecycle with converged networking and security across edges, clouds, endpoints and users
- Integrated: Integrated and unified security, operation, and performance across different technologies, location, deployment options, and the richest Ecosystem
- Automated: Context aware, self-healing network & security posture leveraging cloud-scale and advanced AI to automatically deliver near-real-time, user-to-application coordinated protection across the Fabric

The Fabric empowers organizations of any size to secure and simplify their hybrid infrastructure on the journey to digital innovation.





FortiOS™ Operating System

FortiOS, Fortinet's leading operating system enable the convergence of high performing networking and security across the Fortinet Security Fabric delivering consistent and context-aware security posture across network endpoint, and clouds. The organically built best of breed capabilities and unified approach allows organizations to run their businesses without compromising performance or protection, supports seamless scalability, and simplifies innovation consumption.

The release of FortiOS 7 dramatically expands the Fortinet Security Fabric's ability to deliver consistent security across hybrid deployment models consisting on appliances, software and As-a-Service with SASE, ZTNA and other emerging cybersecurity solutions.

SERVICES



FortiGuard[™] Security Services

FortiGuard Labs offers real-time intelligence on the threat landscape, delivering comprehensive security updates across the full range of Fortinet's solutions. Comprised of security threat researchers, engineers, and forensic specialists, the team collaborates with the world's leading threat monitoring organizations and other network and security vendors, as well as law enforcement agencies.



FortiCare[™] Services

Fortinet is dedicated to helping our customers succeed, and every year FortiCare services help thousands of organizations get the most from their Fortinet Security Fabric solution. We have more than 1,000 experts to help accelerate technology implementation, provide reliable assistance through advanced support, and offer proactive care to maximize security and performance of Fortinet deployments.

SPECIFICATIONS

	FORTIGATE 1000D
Interfaces and Modules	
Hardware Accelerated 10 GE SFP+ Slots	2
Hardware Accelerated GE SFP Slots	16
Hardware Accelerated GE RJ45 Ports	16
GE RJ45 Management / HA Ports	2
USB Ports (Client / Server)	1 / 2
Console Port	1
Onboard Storage	1× 256 GB SSD
Included Transceivers	0
System Performance — Enterprise Traffic M	ix
IPS Throughput ²	6 Gbps
NGFW Throughput ^{2, 4}	5 Gbps
Threat Protection Throughput ^{2,5}	4 Gbps
System Performance and Capacity	
IPv4 Firewall Throughput (1518 / 512 / 64 byte, UDP)	52 / 52 / 33 Gbps
IPv6 Firewall Throughput (1518 / 512 / 86 byte, UDP)	52 / 52 / 33 Gbps
Firewall Latency (64 byte, UDP)	3 µs
Firewall Throughput (Packet per Second)	49.5 Mpps
Concurrent Sessions (TCP)	11 Million
New Sessions/Second (TCP)	280,000
Firewall Policies	100,000
IPsec VPN Throughput (512 byte) 1	25 Gbps
Gateway-to-Gateway IPsec VPN Tunnels	20,000
Client-to-Gateway IPsec VPN Tunnels	100,000
SSL-VPN Throughput	3.6 Gbps
Concurrent SSL-VPN Users (Recommended Maximum, Tunnel Mode)	10,000
SSL Inspection Throughput (IPS, avg. HTTPS) 3	5.0 Gbps
SSL Inspection CPS (IPS, avg. HTTPS) ³	2,700
SSL Inspection Concurrent Session (IPS, avg. HTTPS) ³	800,000
Application Control Throughput (HTTP 64K) ²	14 Gbps
CAPWAP Throughput (1444 byte, UDP)	11 Gbps
Virtual Domains (Default / Maximum)	10 / 250
Maximum Number of FortiSwitches Supported	128
Maximum Number of FortiAPs (Total / Tunnel)	4,096 / 2,048
Maximum Number of FortiTokens	20,000
High Availability Configurations	Active-Active, Active-Passive, Clustering

FORTIGATE 1000D Dimensions and Power Height x Width x Length (inches) 3.48 × 17.20 × 17.95 Height x Width x Length (mm) 88.5 × 437 × 456 Weight 24.70 lbs (11.20 kg) Form Factor (supports EIA / non-EIA standards) Rack Mount, 2 RU AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications Operating Temperature Operating Temperature 32-104°F (0-40°C) Storage Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m) Compliance FCC Part 15 Class A, RCM, VCCI,					
Height x Width x Length (inches) 3.48 × 17.20 × 17.95 Height x Width x Length (mm) 88.5 × 437 × 456 Weight 24.70 lbs (11.20 kg) Form Factor (supports EIA / non-EIA standards) Rack Mount, 2 RU AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications Operating Temperature Operating Temperature 32-104°F (0-40°C) Storage Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)		FORTIGATE 1000D			
Height x Width x Length (mm) 88.5 × 437 × 456 Weight 24.70 lbs (11.20 kg) Form Factor (supports EIA / non-EIA standards) Rack Mount, 2 RU AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications Operating Temperature Operating Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Dimensions and Power				
Weight 24.70 lbs (11.20 kg) Form Factor (supports EIA / non-EIA standards) Rack Mount, 2 RU AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications 32-104°F (0-40°C) Storage Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Height x Width x Length (inches)	3.48 × 17.20 × 17.95			
Form Factor (supports EIA / non-EIA standards) Rack Mount, 2 RU AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications Operating Temperature 32-104°F (0-40°C) Storage Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Height x Width x Length (mm)	88.5 × 437 × 456			
(supports EIA / non-EIA standards) AC Power Supply 100-240V AC, 50/60 Hz Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications Operating Temperature 32-104°F (0-40°C) Storage Temperature -31-158°F (-35-70°C) Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Weight	24.70 lbs (11.20 kg)			
Power Consumption (Average / Maximum) 153 W / 220.8 W Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications 32–104°F (0–40°C) Operating Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)		Rack Mount, 2 RU			
Current (Maximum) 100V / 5A, 240V / 3A Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications 32–104°F (0–40°C) Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	AC Power Supply	100-240V AC, 50/60 Hz			
Heat Dissipation 753.40 BTU/h Redundant Power Supplies Yes, Hot Swappable Operating Environment and Certifications 32–104°F (0–40°C) Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Power Consumption (Average / Maximum)	153 W / 220.8 W			
Redundant Power Supplies Operating Environment and Certifications Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Vp to 7,400 ft (2,250 m)	Current (Maximum)	100V / 5A, 240V / 3A			
Operating Environment and Certifications Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Heat Dissipation	753.40 BTU/h			
Operating Temperature 32–104°F (0–40°C) Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Redundant Power Supplies	Yes, Hot Swappable			
Storage Temperature -31–158°F (-35–70°C) Humidity 10–90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Operating Environment and Certifications				
Humidity 10-90% non-condensing Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Operating Temperature	32-104°F (0-40°C)			
Noise Level 53.3 dBA Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Storage Temperature	-31-158°F (-35-70°C)			
Forced Airflow Front to Back Operating Altitude Up to 7,400 ft (2,250 m)	Humidity	10–90% non-condensing			
Operating Altitude Up to 7,400 ft (2,250 m)	Noise Level	53.3 dBA			
Operating Altitude Up to 7,400 ft (2,250 m)	Forced Airflow	Front to Back			
Compliance FCC Part 15 Class A, RCM, VCCI,	Operating Altitude	Up to 7 400 ft (2 250 m)			
CE, UL/cUL, CB	•	CE, UL/cUL, CB			
Certifications ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN; USGv6/IPv6	Certifications	ICSA Labs: Firewall, IPsec, IPS, Antivirus, SSL-VPN; USGv6/IPv6			

Note: All performance values are "up to" and vary depending on system configuration.

- IPsec VPN performance test uses AES256-SHA256.

 IPse (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.
- 3. SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.
- NGFW performance is measured with Firewall, IPS and Application Control enabled.
 Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.



ORDERING INFORMATION

Product	SKU	Description
FortiGate 1000D	FG-1000D	$2\times$ 10 GE SFP+ slots, 16x GE SFP slots, 16x GE RJ45 ports, 2x GE RJ45 Management ports, SPU NP6 and CP8 hardware accelerated, 1× 256 GB SSD onboard storage, dual AC power supplies.
Optional Accessories/Spares	SKU	Description
1 GE SFP LX Transceiver Module	FG-TRAN-LX	1 GE SFP LX transceiver module for all systems with SFP and SFP/SFP+ slots.
1 GE SFP RJ45 Transceiver Module	FG-TRAN-GC	1 GE SFP RJ45 transceiver module for all systems with SFP and SFP/SFP+slots.
1 GE SFP SX Transceiver Module	FG-TRAN-SX	1 GE SFP SX transceiver module for all systems with SFP and SFP/SFP+ slots.
10 GE SFP+ Transceiver Module, Short Range	FG-TRAN-SFP+SR	10 GE SFP+ transceiver module, short range for all systems with SFP+ and SFP/SFP+ slots.
10 GE SFP+ Transceiver Module, Long Range	FG-TRAN-SFP+LR	10 GE SFP+ transceiver module, long range for all systems with SFP+ and SFP/SFP+ slots.
10 GE SFP+ Active Direct Attach Cable, 10m / 32.8 ft	SP-CABLE-ADASFP+	10 GE SFP+ active direct attach cable, 10m / 32.8 ft for all systems with SFP+ and SFP/SFP+ slots.
Ear Bracket for Rack Mounting, 2 RU	SP-EAR-FG1000D	Ear bracket for rack mounting, 2 RU for FG-1000D.
AC Power Supply	SP-FXX1000D	AC power supply for FG-1000D and FXX-1000D.

BUNDLES



FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.

Bundles	360 Protection	Enterprise Protection	Unified Threat Protection	Advanced Threat Protection
FortiCare	ASE 1	24×7	24×7	24×7
FortiGuard App Control Service	•	•	•	•
FortiGuard IPS Service	•	•	•	•
FortiGuard Advanced Malware Protection (AMP) — Antivirus, Mobile Malware, Botnet, CDR, Virus Outbreak Protection and FortiSandbox Cloud Service	•	•	•	•
FortiGuard Web and Video ² Filtering Service	•	•	•	
FortiGuard Antispam Service	•	•	•	
FortiGuard Security Rating Service	•	•		
FortiGuard IoT Detection Service	•	•		
FortiGuard Industrial Service	•	•		
FortiConverter Service	•	•		
SD-WAN Orchestrator Entitlement	•			
SD-WAN Cloud Assisted Monitoring	•			
SD-WAN Overlay Controller VPN Service	•			
Fortinet SOCaaS	•			
FortiAnalyzer Cloud	•			
FortiManager Cloud	•			

1. 24×7 plus Advanced Services Ticket Handling 2. Available when running FortiOS 7.0



www.fortinet.com

Copyright © 2021 Fortinet, Inc., All rights reserved. FortiGate*, Fortigate*,