

DATA SHEET

AP 650

Enterprise-grade 4x4, 4-stream, 802.11ax Access Point with Integrated Antennas





The AP650 is designed for high performance environments – combining the latest in Wi-Fi standards (IEEE 802.11ax technology), the latest in Ethernet standards (2.5 GHz capability), and Aerohive’s software-defined dual 5 GHz radios for indoor and industrial environments. AP650 has integrated BLE and USB connectivity for enhanced location-driven services and the ability to provide additional wireless access options for IoT and other devices.

Powered by HiveOS and the innovative distributed Cooperative Control architecture, **AP650** brings the best of capacity and advanced high-efficiency 802.11ax technology. In addition, the integrated BLE radio and a USB interface in the access point opens up a multitude of deployment use-cases in IoT and proximity/location-oriented services.

The AP650 benefits from an AI-driven Wi-Fi architecture capable of self-organizing, self-learning, self-healing and self-optimizing in the most challenging environments. Cooperative Control eliminates single points of failure and bottlenecks, delivering stability and unbridled performance, complementing the capabilities of HiveOS - a stateful L2-L7 DPI firewall for context-based access security, advanced and customizable QoS for traffic optimization, intelligent meshing algorithms, Private Pre-Shared Key (PPSK) and much more.

All Aerohive APs can be centrally managed using Aerohive’s out-of-band cloud network management system - *HiveManager*. HiveManager is an industry-leading and visionary approach to cloud-managed networking, built from the ground up to take full advantage of the SD-LAN and SD-WAN solution from Aerohive. Working in tandem with Aerohive’s HiveOS, HiveManager leverages state-of-the-art cloud technology. Benefit from unified, full-stack management of Wi-Fi, switching and routing, centralized monitoring and configuration, real-time and historical reporting, simplified troubleshooting, integrated RF planner tools and much more.

HiveManager is available in two editions: *Connect* and *Select*. The Connect solution is bundled with Aerohive access points and switches and is free for the lifetime of the device. Connect is the perfect solution for those looking to provide robust, yet enterprise-grade connectivity, without having to invest in the full suite of management features. The optional upgrade to Select unlocks a multitude of advanced features and capabilities that enhance network management, security and visibility.

Radio Specifications

Wireless Frequency Range

- USA: 2.400 ~ 2.483 GHz, 5.15 ~ 5.35 GHz, 5.47 ~ 5.725 GHz, 5.725 ~ 5.85 GHz
- Europe: 2.400 ~ 2.483 GHz, 5.15 ~ 5.35 GHz, 5.47 ~ 5.725 GHz
- Japan: 2.400 ~ 2.497 GHz, 5.15 ~ 5.35 GHz, 5.47 ~ 5.725 GHz
- China: 2.400 ~ 2.483 GHz, 5.725 ~ 5.85 GHz

Modes

- IEEE802.11a 5 GHz OFDM
- IEEE802.11b 2.4 GHz DSSS/CCK
- IEEE802.11g 2.4 GHz OFDM
- IEEE802.11n 2.4 GHz/5 GHz OFDM
- IEEE802.11ac OFDM
- IEEE802.11ax OFDMA

Channel Support

802.11 b/g/n/ax

- US/Canada: 11 (1 ~ 11)
- Major European country: 13 (1 ~ 13)
- France: 4 (10 ~ 13)
- Japan: 11b: 14 (1~13 or 14th), 11g: 13 (1 ~ 13)
- China: 13 (1 ~ 13)

802.11 a/n/ac/ax

- US/Canada: 24 non-overlapping channels (36,40,44,48,52,56,60,64;100,104,108, 112,116,120,124,128,132,136,140; 149,153,157,161,165)
- Europe: 19 non-overlapping channel (36,40,44,48,52,56,60,64;100,104,108,112, 116,120,124,128,132,136,140)
- Japan: 19 non-overlapping channels (36,40,44,48,52,56,60,64;100,104,108,112, 116,120,124,128,132,136,140)
- China: 5 non-overlapping channels (149,153,157,161,165)

Modulation Technology

802.11 Legacy a/b/g

- DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- DSSS (Direct Sequence Spread Spectrum) with DBPSK (Differential Binary Phase Shift Keying 1 Mbps), DQPSK (Differential Quaternary Phase Shift Keying 2 Mbps), and CCK (Complementary Code Keying 5.5 & 11 Mbps), and OFDM (Orthogonal Frequency Division Multiplexing with BPSK for 6, 9 Mbps. QPSK for 12, 18 Mbps, 16QAM for 24, 36 Mbps, 64QAM for 48, 54 Mbps)

802.11n

- OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

802.11ac

- OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)

802.11ax

- OFDMA (1024-QAM)

Interfaces

- 1x 10/100/1000 Gigabit Ethernet
- 1x 2.5 mGig
- RJ-45 Console Port
- USB Interface
- 802.3az supported
- Redundant PoE Capable

Radios

- Dual Radio AP, 2.4 GHz and 5 GHz, simultaneous dual band
- 2.4 GHz, 802.11b/g/n/ax, 4x4
- 5 GHz, 802.11 a/n/ac/ax, 4x4
- 160 MHz, 1024-QAM supported

PoE

- PoE: 802.3at (PoE+)
- Typical: 18.8 W. Max: 20.7 W

Power Consumption

- 802.3at Input: Typical 15.72 W, Max 19.92 W
- DC: Typical 18.78 W, Max 20.65 W

Environmental

- Operating Temperature: 0 to 40° C
- Storage Temperature: -40 to 70° C
- Humidity: 10 to 95%
- MTBF: >500,000 Hours @ 25° C (*estimate*)
- RoHS: -2 Compliant

Physical

- Dimensions: 225mm x 225mm x 37.5mm
- Weight: 2.6lb (1.18kg)
- Wall or ceiling mountable

Antenna

- 4x 2.5 GHz, Omni directional antenna
- 4x 5 GHz, Omni directional antenna
- 1x Bluetooth Antenna

Peak Antenna Gain:

- 2.4 GHz Omni Directional, gain 5.0 dBi
- 5 GHz Omni Directional, gain 6.0 dBi
- Bluetooth Omni Directional, gain 4.2 dBi

Power - 2.4 GHz

CHANNEL	DATA RATE	POWER (dBm)
11b	1,2,5,5,11 Mbps	18
	54 Mbps	15
11g	48 Mbps	16
	36 Mbps	17
	6 Mbps	18
	MCS0,1,2	18
HE20	MCS3	17
	MCS4,5	16
	MCS6,7	15
	MCS8,9	14
	MCS10,11	12
	MCS0,1,2	18
HE40	MCS3	17
	MCS4,5	16
	MCS6,7	15
	MCS8,9	14
	MCS10,11	12

Receive Sensitivity - 2.4 GHz

CHANNEL	DATA RATE	SENSITIVITY
11b	1 Mbps	-98
	11 Mbps	-90
11g	6 Mbps	-96
	54 Mbps	-78
HE20	MCS0	-95
	MCS11	-64
HE40	MCS0	-92
	MCS11	-62


Power - 5 GHz

CHANNEL	DATA RATE	POWER (DBM)
11a	54 Mbps	17
	48 Mbps	17
	36 Mbps	18
	6 Mbps	19
HE20	MCS0,1,2	19
	MCS3,4	17
	MCS5,6	16
	MCS7,8	15
	MCS9	14
	MCS10	13
	MCS11	12
HE40	MCS0,1,2	17
	MCS3,4,5	16
	MCS6,7,8	15
	MCS9	14
	MCS10	13
	MCS11	12
HE80	MCS 0,1,2	17
	MCS 3,4,5	16
	MCS 6,7,8	15
	MCS 9	14
	MCS 10	13
	MCS 11	12
HE160	MCS 0,1,2	17
	MCS 3,4,5	16
	MCS 6,7,8	15
	MCS 9	14
	MCS 10	13
	MCS 11	12


Receive Sensitivity - 5 GHz

CHANNEL	DATA RATE	SENSITIVITY
11g	6 Mbps	-86
	54 Mbps	-73
HE20	MCS0	-87
	MCS11	-58
HE40	MCS0	-88
	MCS11	-56
HE80	MCS0	-83
	MCS11	-53
HE160	MCS0	-82
	MCS11	-51


Azimuth - 2.4 GHz

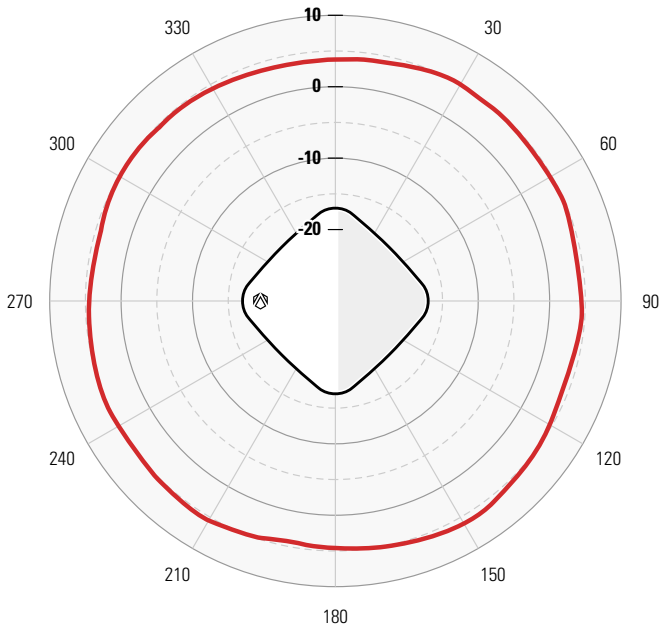


Elevation - 2.4 GHz

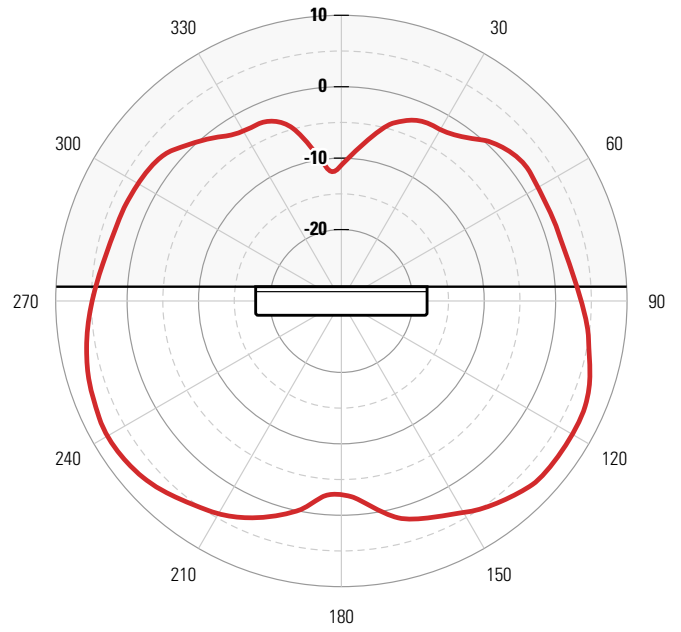

Azimuth - 5 GHz

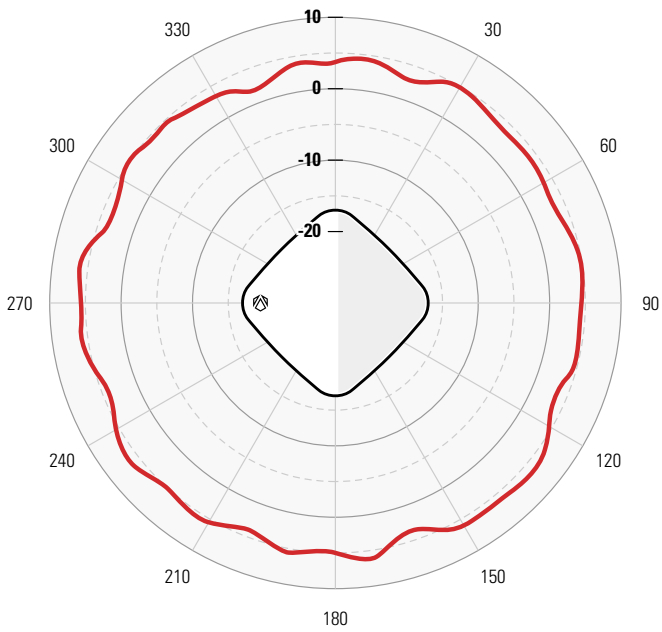

Elevation - 5 GHz

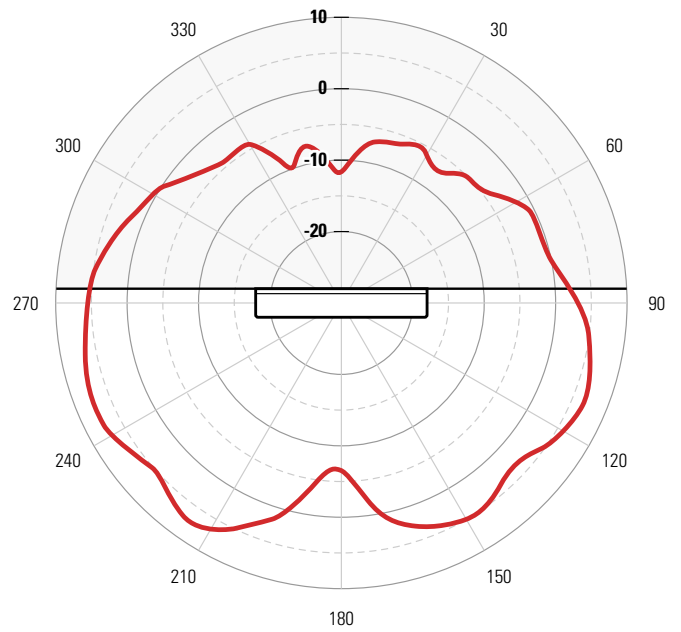

AP650 - SKUs

SKU	DESCRIPTION
AH-AP-650-AX-XX	AP650 Indoor plenum rated AP, dual 5 GHz radio 4x4:4 802.11ac/ax AP, 1x NBASE-T™ Ethernet port and 1x GE Ethernet port, with internal antennas. Includes HiveManager Connect and HiveCare Community. (Regulatory Domains available: FCC, CE, W (World), CAN (Canada))

AP650 - MISCELLANEOUS SKUs

SKU	DESCRIPTION
AH-ACC-INJ-30W-UK	30W POE power injector with UK power cord for AP122,AP122X,AP130, AP200 series,AP550,AP630,AP650 and AP650X
AH-ACC-INJ-30W-US	30W POE power injector with US power cord for AP122,AP122X,AP130, AP200 series,AP550,AP630,AP650 and AP650X
AH-ACC-INJ-30W-AU	30W POE power injector with Australia/New Zealand power cord for AP122,AP122X,AP130, AP200 series,AP550,AP630,AP650 and AP650X
AH-ACC-INJ-30W-EU	30W POE power injector with EU power cord for AP122,AP122X,AP130, AP200 series,AP550,AP630,AP650 and AP650X