
CyberPower



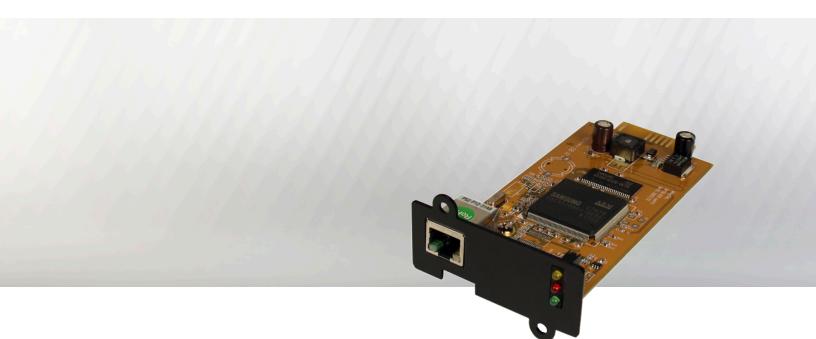

RMCARD301 Remote Management Card

Remotely manage, monitor and control your UPS from a web browser or SNMP management application.

The CyberPower RMCARD301 is a fullfeatured network UPS management device that remotely manages, monitors, and controls your CyberPower UPS products.

This internal remote management card allows for monitoring and control of a UPS via Web Browser or NMS. By utilizing the auto-shutdown software, servers and workstations stay protected from data loss due to power failure. Event log in software traces history of the UPS operational history. Security management is also provided.

A Three-Year Warranty ensures that this network management card has passed our highest quality standards in design, assembly, material and workmanship.

Features

- Real time UPS monitoring for Smart App Online Units
- Remote Management and Configuration of UPS (HTTP) via Web Browser or NMS
- Automatic Events Notification via
 SNMP Trap
- 10Mbps Ethernet Compatible
- Event & Data Logging
- Supports TCP/IP, UDP, SNMP, and HTTP protocols
- Security Management Provided

RMCARD301 Remote Management Card Remotely manage, monitor and control your UPS from a web browser or SNMP management application.

| GENERAL | |
|---------------------------|------------------------------------|
| Туре | Network Management Card |
| COMMUNICATION | |
| Protocols | TCP/IP, UDP, SNMP, HTTP protocol |
| Network Connection | RJ45 - 10Mbps Ethernet |
| PHYSICAL | |
| Dimensions (WxHxD) (in.) | 2.64 x 1.65 x 5.28 |
| Dimensions (WxHxD) (mm.) | 67.06 x 41.91 x 134.11 |
| Weight (lbs.) | 0.14 |
| Weight (kg.) | 0.06 |
| SHIPPING DIMENSIONS | |
| Dimensions (WxHxD) (in.) | 6.50 x 2.40 x 6.80 |
| Dimensions (WxHxD) (mm.) | 165 x 61 x 173 |
| Weight (lbs.) | 0.42 |
| Weight (kg.) | 0.19 |
| ENVIRONMENTAL | |
| Operating Temperature | 32°F to 104°F / 0°C to 40°C |
| Operating Humidity | 0% - 90% non-condensing |
| Operating Elevation | 0-10000 feet (0-3000 meters) |
| Storage Temperature | 14°F to 122°F / -10°C to 50°C |
| Storage Relative Humidity | 0% - 95% non condensing |
| Storage Elevation | 0-50000 feet (0-15000 meters) |
| COMPATIBILITY | |
| UPS Models | *Online Series UPS with Smart Slot |
| CERTIFICATIONS | |
| Safety | FCC Class A, CE |
| Environmental | RoHS Compliant |
| | |
| WARRANTY | |